


# 附件 Attachment

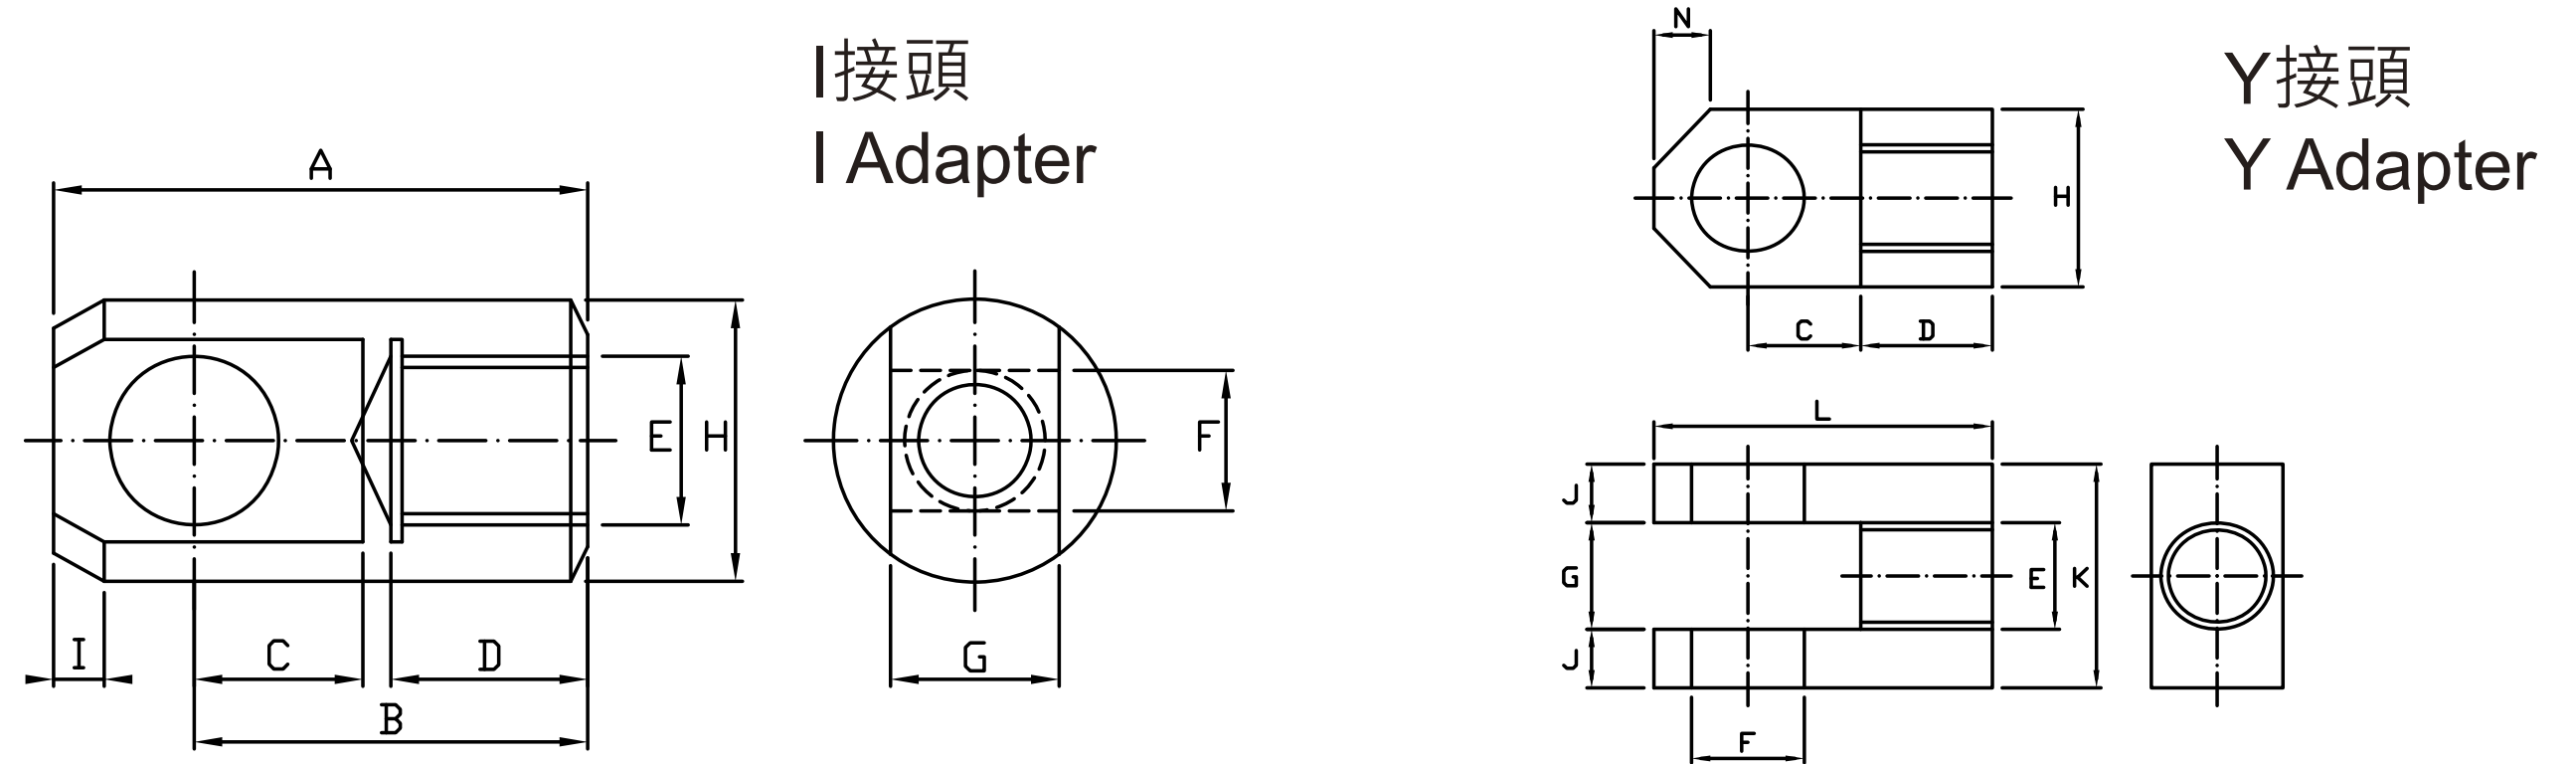

缸徑 Bore dia.	A	B	C	D	E	ØF	G	H	I	J	K	L	N
Ø40	70	54	20	28	M18xP1.5	16	20	32	5	10	40	64	8
					M22xP1.5								
Ø50	80	60	25	30	M22xP1.5	20	25	40	7	15	55	75	10
					M26xP1.5								
Ø63	95	70	30	35	M26xP1.5	25	30	50	9	16.5	63	90	15
					M30xP1.5								
Ø80	110	80	35	40	M30xP1.5	30	35	60	9	20	75	105	15
					M35xP1.5								
Ø100	135	95	40	50	M40xP1.5	40	45	80	12	25	95	130	15
					M45xP1.5								
Ø125	170	120	55	60	M45xP1.5	50	55	100	15	30	115	165	20
					M55xP2.0								
Ø150	190	130	60	65	M55xP2.0	60	65	120	20	40	145	185	20
					M65xP2.0								
Ø180	240	180	85	90	M65xP2.0	80	85	160	25	50	185	255	25
					M75xP2.0								
Ø200	290	200	95	100	M75xP2.0	90	95	180	30	60	215	285	30
					M95xP2.0								
Ø224	330	230	105	110	M95xP2.0	100	110	200	30	62.5	235	315	30
					M105xP2.0								
Ø250	330	230	105	110	M100xP2.0	100	110	200	30	62.5	235	315	30
					M110xP2.0								

## 特點說明：

- 1.表列規格參照JIS標準及CNS國家標準精心製造。
- 2.鋼管採用無縫冷間鋼管，內徑加工精度高，其表面粗度在Ho~1.5S(即0.0015mm)油環壽命增長。
- 3.O ring採用原裝進口之高級品，壽命特長。
- 4.標準品之各種零件均有互換性，保養容易。
- 5.使用壓力標準可分三種：a)0-70kgf/cm<sup>2</sup>低壓。  
b)70-140kgf/cm<sup>2</sup>中壓。  
c)140-210kgf/cm<sup>2</sup>高壓。
- 6.最大內徑及行程標準為500x3000mm行程以內，其它規格外之產品或特殊性能諸如：耐熱(200°C)、耐低溫(-50°C)、高速及特殊環境使用等，本公司亦可接受訂製。
- 7.品質嚴格管制，所有產品均經測試，始行出廠。

## Features：

- 1.The mentioned specifications which is accorded JIS standard & CNS national standard and manufactured honestly.
- 2.The cylinder tube is adopted cold seamless steel tube and inner portion by high precision processing. The surface roughness is at Ho~1.5S(i.e 0.0015mm),so far,the O ring servicing life must prolonged.
- 3.The o ring is adopted originally and from imported long servicing life.
- 4.The each parts for standard products which can be replaced, easy of servicing.
- 5.The operating pressure standard can be divided into 3 models :  
a.0-70kgf/cm<sup>2</sup> low pressure.  
b.70-140kgf/cm<sup>2</sup> medium pressure.  
c.140-210kgf/cm<sup>2</sup> high pressure.
- 6.The max.bore dia.and stroke is within bore 500x3000mm for standard model.As for other products or with special character such as thermo-resisted high speed and operated at special condition etc., which products made on customer's request.
- 7.The quality is controlled strictly and total products are passed through each testing before deliver.

\* 本公司尚接受使用於環境惡劣場所之油壓缸訂製(諸如耐熱、耐酸鹼、高速作業等)

Our company also available the hyd.cylinder on requested which employed in inferior condition (Such as : Thermal-Resistant. Acid & Alkalis Resistant and Hi-Speed Actioned etc.,)